

EVEN MORE FUN WITH ITS INTEGRATED WOODSHED.

VERTICAL STEEL WOOD STOVES



COMBUSTION AND MATERIALS

- **Dual combustion** for more efficient and cleaner combustion (minimum CO and dust content)
- **Vermiculite baffle**
- Made of high quality lamellar graphite cast iron
- Double wall cast iron for extra strength
- Removable cast iron grating
- High-strength ceramic glass

INSTALLATION AND USE

- Back or **top flue connection** (150 mm)
- **Back protection** to reduce the rear side temperature
- Small installation distance can be positioned **30 cm from the wall**
- Load facilitated by its high height
- Adjustable primary and secondary air
- "Clean glass" system
- Diagonal view of the fire of 43 cm (16 inches)
- Large capacity removable ashtray

PRODUCT PERFORMANCE	
Nominal power	4.8 kW
Power range	4 to 6 kW
Efficiency	77.6 %
Seasonal efficiency	67.6 %
CO (13 % O ₂) (mg/Nm ³)	0.07 - 826
Nominal load	1.37 kg/h
Dust (mg/Nm ³)	26
NO _x (mg/Nm ³)	121
COV (OGC) (mg/Nm ³)	45
Mean flue gas temperature	285 °C
Flue gas mass flow	4.7 g/s
Nozzle depression (nominal)	12 Pa
CO ₂ emissions	9.91 %
Dual combustion	Yes
Airtight	Yes
ECODESIGN 2022	Yes

PRODUCT INFORMATION	
EAN Code:	376 007 541 148 0
Product code	FR9010550B
Main material	Steel
View of the fire (diagonal)	43 cm (16 inch)
Log size	25 cm (30 cm MAX.)
Gross weight	110 kg
Net Weight	95 kg
Dimensions LxHxD	41.7 x 93.6 x 36.6 cm
Packaging dimensions LxHxD	49.5 x 123.5 x 53 cm


INSTALLATION AND SIZING	
Diameter of flue gas nozzle	150 mm
Flue gas connection	Back or above part
Flue collar	Male
Diameter connection to outside air	100 mm (back)
Back installation distance*	30 cm
Lateral installation distance*	30 cm

*Distance between the heater and combustible materials

PRODUCT PHOTOS



Integrated woodshed length of 41 cm for storing firewood within easy.

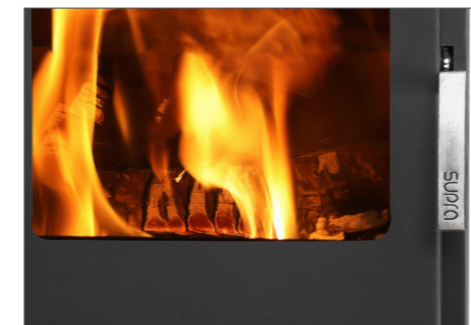

Ergonomic handle adapted for its everyday use.

DIMENSIONAL PLAN

