


| Sizes |    |      | CHOPOK 2R90<br>73 LD<br>730/450/330 | CHOPOK 2R90<br>73 LD<br>730/510/330 | CHOPOK 2R90<br>73 LD<br>730/570/330 |
|-------|----|------|-------------------------------------|-------------------------------------|-------------------------------------|
| 1     | A  | mm   | 730                                 |                                     |                                     |
| 2     | F  | mm   | 1150                                | 1210                                | 1270                                |
| 3     | C  | mm   | 470                                 |                                     |                                     |
| 4     | DN | Ø mm | 180                                 |                                     |                                     |
| 5     | B  | mm   | 450                                 | 510                                 | 570                                 |
| 6     | V  | mm   |                                     |                                     |                                     |
| 7     | R  | mm   | 330                                 |                                     |                                     |
| 8     | AA | mm   |                                     |                                     |                                     |
| 9     | H  | mm   |                                     |                                     |                                     |
| 10    | J  | mm   | 325 + /110/                         |                                     |                                     |
| 11    | K  | Ø mm | 4x125                               |                                     |                                     |
| 12    | L  | Ø mm | 125                                 |                                     |                                     |
| 13    | M  | mm   |                                     |                                     |                                     |
| 14    | N  | mm   | 50                                  |                                     |                                     |

**Basic design:**

Thermodynamic Hearth  
 Segment chamotte lining (SO)  
 Glass Classic  
 Inox control grip-handle RP2, 2xRP1  
 Environmentally friendly varnish

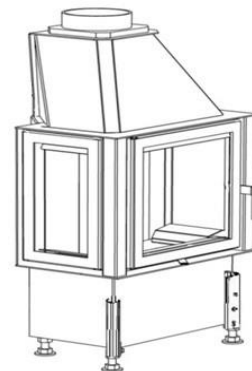

| Technical parameters |  |                           |      |
|----------------------|--|---------------------------|------|
| 1                    | Nominal heat output                                      | kW                        | 10,5 |
| 2                    | Pressure required  | Pa                        | 12   |
| 3                    | Average efficiency                                       | %                         | 77   |
| 4                    | Average flue gas temperature                             | °C                        | 267  |
| 5                    | Wood consumption   | kg/h                      | 3,3  |
| 6                    | Consumption of combustion air                            | m <sup>3</sup> /hod       | 32   |
| 7                    | Emission of CO to 13% O <sub>2</sub>                     | %                         | 0,1  |
| 8                    | Flue gas mass flow                                       | g/s                       | 11,8 |
| 9                    | Weight   | kg                        | 190  |
| 10                   | Required min. cross section for circulating air - INPUT  | cm <sup>2</sup>           | 325  |
| 11                   | Required min. cross section for circulating air - OUTPUT | cm <sup>2</sup>           | 525  |
| 12                   | Three-component insulated chimney - active height 5 m    | Ø cm                      | 180  |
| 13                   | Character of building construction with fireplace insert | warm air convection       | Yes  |
|                      |  | heat storage without conv | Yes  |

**Optional accessories:**

Cover frame (KR)  
 Glass Reflex (SR)  
 External ashtray (VOP)  
 Lower hearth (ZO)  
 Convectional casing (DP)  
 Vertical heat-storing panel (AZ)  
 Heat accumulation quadrant (APO)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk