


Sizes			CHOPOK R90 67 LD 670/450 /450(L/P)	CHOPOK R90 67 LD 670/510 /450(L/P)	CHOPOK R90 67 LD 670/570 /450(L/P)
1	A	mm		670	
2	F	mm	1150	1210	1270
3	C	mm		470	
4	DN	Ø mm		180	
5	B	mm	450	510	570
6	V	mm		725	
7	R	mm		450	
8	AA	mm			
9	H	mm			
10	J	mm		325 + /110/	
11	K	Ø mm		4x125	
12	L	Ø mm		125	
13	M	mm			
14	N	mm		50	

**Basic design:**

Thermodynamic Hearth  
Segment chamotte lining (SO)  
Glass Classic  
Inox control grip-handle RP2, RP1  
Environmentally friendly varnish

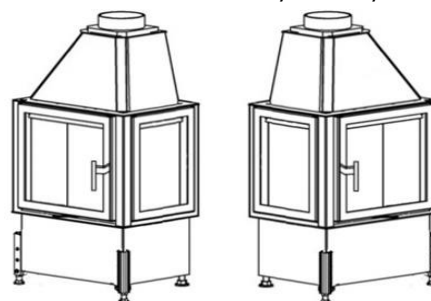

CHOPOK R90 /450 P

CHOPOK R90 /450 L

Technical parameters			
1	Nominal heat output	kW	10,0
2	Pressure required	Pa	12
3	Average efficiency	%	82,9
4	Average flue gas temperature	°C	233
5	Wood consumption	kg/h	3,2
6	Consumption of combustion air	m <sup>3</sup> /h	30
7	Emission of CO to 13% O <sub>2</sub>	%	0,1
8	Flue gas mass flow	g/s	8,6
9	Weight	kg	190
10	Required min. cross section for circulating air - INPUT	cm <sup>2</sup>	300
11	Required min. cross section for circulating air - OUTPUT	cm <sup>2</sup>	500
12	Three-component insulated chimney - active height 5 m	Ø cm	180
13	Character of building construction with fireplace insert	warm air convection	Yes
		heat storage without conv	Yes

**Optional accessories:**

Cover frame (KR)  
Glass Reflex (SR)  
External ashtray (VOP)  
Lower hearth (ZO)  
Convictional casing (DP)  
Vertical heat-storing panel (AZ)  
Heat accumulation quadrant (APO)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk