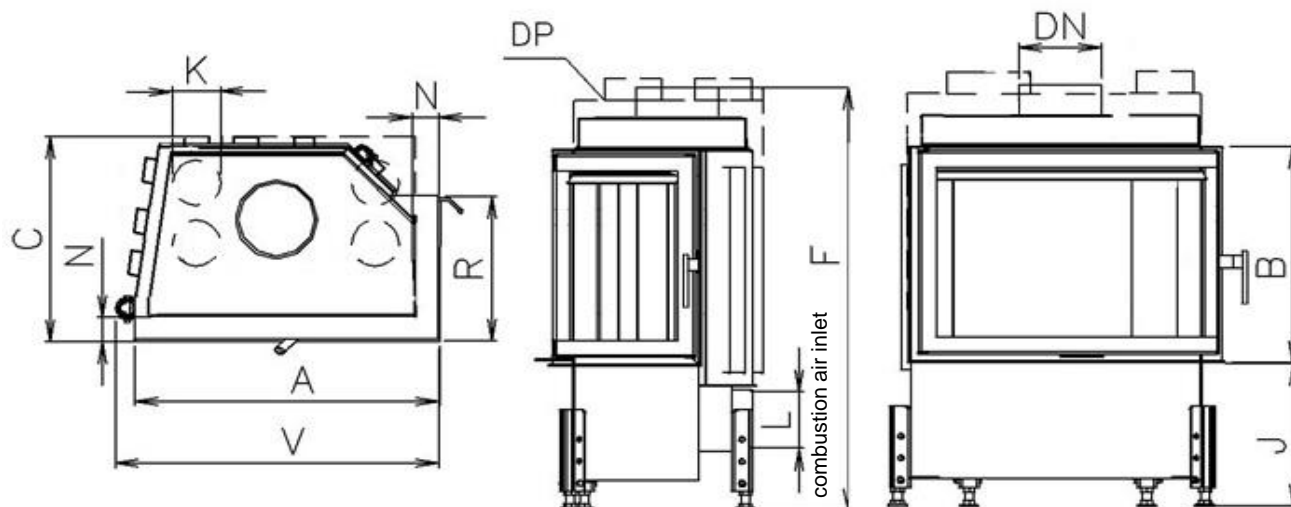


**KAZETA R90 67 LD 670/450,510-S/330 (L/P)**


Low-energy range 67

**Low-energy fireplace insert**



| Sizes |    | KAZETA R90<br>67 LD 670/450-<br>S/330 (L/P) | KAZETA R 90<br>67 LD 670/510-<br>S/330 (L/P) |      |
|-------|----|---|--|------|
| 1     | A  | mm  | 670  |      |
| 2     | F  | mm  | 960  | 1020 |
| 3     | C  | mm  | 470  |      |
| 4     | DN | Ø mm  | 180  |      |
| 5     | B  | mm  | 450  | 510  |
| 6     | FF | mm  |  |      |
| 7     | R  | mm  | 330  |      |
| 8     | V  | mm  | 725  |      |
| 9     | H  | mm  |  |      |
| 10    | J  | mm  | 325 + /160/                                  |      |
| 11    | K  | Ø mm  | 4x125  |      |
| 12    | L  | Ø mm  | 125  |      |
| 13    | M  | mm  |  |      |
| 14    | N  | mm  | 50   |      |

**Basic design:**

Thermodynamic Hearth  
 Segment chamotte lining  
 Glass Classic  
 Inox control grip-handle RP2  
 Enviromentally friendly varnish



KAZETA R90 -S/330 P



KAZETA R90 -S/330 L

| Technical parameters |  |                           |      |
|----------------------|--|---------------------------|------|
| 1                    | Nominal heat output                                      | kW                        | 6,5  |
| 2                    | Pressure required  | Pa                        | 12   |
| 3                    | Average efficiency                                       | %                         | 77,7 |
| 4                    | Average flue gas temperature                             | °C                        | 259  |
| 5                    | Wood consuption  | kg/h                      | 2,1  |
| 6                    | Consumption of combustion air                            | m <sup>3</sup> /hod       | 19,5 |
| 7                    | Emission of CO to 13% O2                                 | %                         | 0,1  |
| 8                    | Flue gas mass flow                                       | g/s                       | 6,8  |
| 9                    | Weight   | kg                        | 185  |
| 10                   | Required min. cross section for circulating air - INPUT  | cm <sup>2</sup>           | 200  |
| 11                   | Required min. cross section for circulating air - OUTPUT | cm <sup>2</sup>           | 325  |
| 12                   | Three-component insulated chimney - active height 5 m    | Ø cm                      | 180  |
| 13                   | Character of building construction with fireplace insert | warm air convection       | Yes  |
|                      |  | heat storage without conv | Yes  |

**Optional accessories:**

Cover frame (KR)  
 Glass Reflex (SR)  
 Black printed glass(SM)  
 Black printed glass Reflex (SMR)  
 External ashtray (VOP)  
 Lower hearth (ZO)  
 Convectional casing (DP)  
 Rear feeding door (PD)  
 Vertical heat-storing panel (AZ)  
 Heat accumulation quadrant (APO)  
 Divided door (LD2)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2, Commission Regulation (EU) č. 2015/1185 Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk