## ANAYA TRI-VISION

ENJOY THE FIRE FROM DIFFERENT ANGLES



HORIZONTAL CAST IRON STOVES



| PRODUCT PERFORMANCE         |            |  |
|-----------------------------|------------|--|
| Nominal power               | 9.1 kW     |  |
| Power range                 | 6 to 10 kW |  |
| Efficiency                  | 80 %       |  |
| Seasonal efficiency         | 70 %       |  |
| CO (13 % 02) (%/mg/Nm³)     | 0.05 /619  |  |
| Nominal load                | 2.5 kg/h   |  |
| Dust (mg/Nm3)               | 23         |  |
| NOx (mg/Nm3)                | 100        |  |
| COV (OGC) (mg/Nm3)          | 36         |  |
| Mean flue gas temperature   | 308 °C     |  |
| Flue gas mass flow          | 7.2 g/s    |  |
| Nozzle depression (nominal) | 12 Pa      |  |
| CO <sub>2</sub> emissions   | 12.08 %    |  |
| Dual combustion             | Yes        |  |
| Airlight                    | Yes        |  |
| ECODESIGN 2022              | Yes        |  |
|                             |            |  |

PRODUCT PHOTOS



## COMBUSTION AND MATERIALS

- Enjoy the fire from 3 angles: glass ceramic sides
- **TOTAL CONTROL TECHNOLOGY**: The two air controls allow full control via the grate and afterburner air controls concealed in the interior compartment
- RE 2020 COMPATIBLE AIRTIGHT: high level of airtightness
   allows combustion air control (fully channelled and
   controllable primary air, secondary air and window air)
- High density vermiculite interior for increased
  resistance to extreme temperatures and improved
  combustion
- Removable cast iron grating
- High-strength ceramic glass

## INSTALLATION AND USE

- **Back or** top flue connection (150 mm)
- Back protection to reduce the rear side temperature
- Small installation distance can be positioned 15 cm from
   the wall
- Load facilitated by its high height
- Adjustable primary and secondary air
- "Clean glass" system
- Large view of the fire diagonal 56 cm (22 inches)
- Removable large capacity ashtray



Even more fun: heater with a triple view of the fire.




Simplified everyday use: high handle designed to be held without bending over.



| PRODUCT INFORMATION         |                          |
|-----------------------------|--------------------------|
| EAN Code:                   | 376 007 <b>541 152</b> 0 |
| Product code                | FR9010590B               |
| Main material               | Steel                    |
| View of the fire (diagonal) | 56 cm (22 inch)          |
| Log size                    | 33 cm (A) 50 cm (v)      |
| Gross weight                | 145 kg                   |
| Net Weight                  | 123 kg                   |
| Dimensions LxHxD            | 50.8 x 105.4 x 43.8 cm   |
| Packaging dimensions LxHxD  | 56 x 123.5 x 56 cm       |
|                             |                          |

| INSTALLATION AND SIZING            |                    |  |
|------------------------------------|--------------------|--|
| Diameter of flue gas nozzle        | 150 mm             |  |
| Flue gas connection                | Back or above part |  |
| Flue collar                        | Male               |  |
| Diameter connection to outside air | 100 mm (back)      |  |
| Back installation distance*        | 15 cm              |  |
| Lateral installation distance*     | 70 cm              |  |
|                                    |                    |  |

\*Distance between the heater and combustible materials

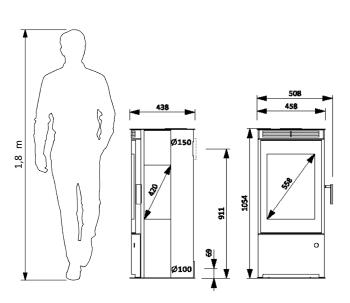

## DIMENSIONAL PLAN