

NEW

KRIS



100 to 200
m²

SUPRO.

NORDIC ATMOSPHERE, AN INVITATION TO RELAXATION AND WELL-BEING.

HORIZONTAL CAST IRON STOVES



COMBUSTION AND MATERIALS

- **Dual combustion** for more efficient and cleaner combustion (minimum CO and dust content)
- **Vermiculite baffle**
- **Made of high quality** lamellar graphite cast iron
- **Double wall cast iron for extra strength**
- Removable cast iron grating
- **Scandinavian style** wooden legs
- High-strength **ceramic glass**

INSTALLATION AND USE

- Back or top **flue connection** (150 mm)
- **Rear protection** to protect any nearby installations
- **Small installation distance** as it can be positioned 30 cm from the wall
- **Integrated handle** with a sleek design
- Adjustable primary and secondary air
- "Clean glass" system
- Removable **large capacity ashtray**

PRODUCT PERFORMANCE	
Nominal power	10 kW
Power range	6 to 14 kW
Efficiency	77%
Seasonal efficiency	67%
CO (13 % O ₂) (mg/Nm ³)	0,10 / -
Nominal load	2.9 kg/h
Dust (mg/Nm ³)	18
NOx (mg/Nm ³)	105
VOC (OGC) (mg/Nm ³)	99
Mean flue gas temperature	314 °C
Flue gas mass flow	-
Nozzle depression (nominal)	12 Pa
CO ₂ emissions	10.4 %
Dual combustion	Yes
Airtight	No
ECODESING 2022	Yes

PRODUCT INFORMATION	
EAN Code:	376 007 541 334 7
Product code	FR9016130B
Main material	Cast iron
View of the fire (diagonal)	53 cm (21 inch)
Log size	50cm
Gross weight	176 kg
Net weight	166 kg
Dimensions LxHxD	70.2 x 91.4 x 43.2 cm
Size of pack LxHxD	72 x 77.5 x 48 cm

INSTALLATION AND SIZING	
Diameter of flue gas nozzle	150mm
Flue gas connection	Back or above part
Flue collar	Male
Back installation distance*	30cm
Lateral installation distance*	45cm

*Distance between the heater and combustible materials


PRODUCT PHOTOS



26.5 cm high wooden legs for easy log loading



DIMENSIONAL PLAN

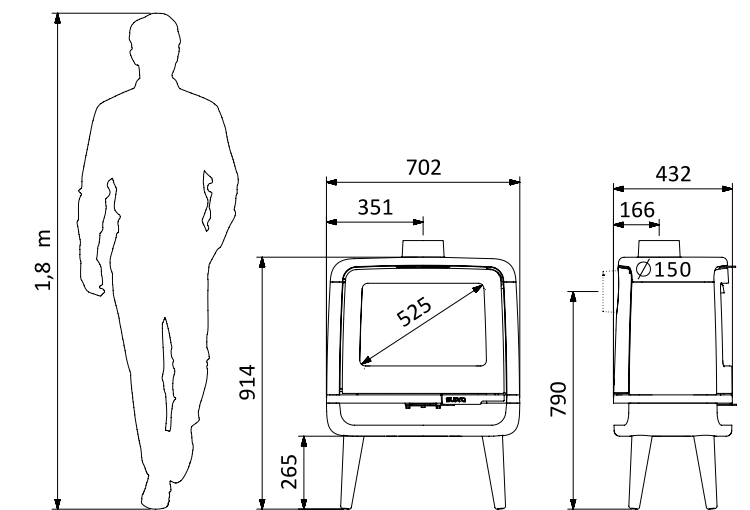

Exclusive KRIS design : Curved view of the flame, diagonal of 53 cm (21 inches)